

HS-150S Premium Accelerometer


AC acceleration output via 2 Pin MS Connector

Key Features


- For use with data collector and online systems
- Side entry for easy access
- Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



Connection Details



Technical Performance

Mounted Base Resonance	see: 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$ 0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Mounting Bolt provided	see: 'How To Order' table x 35mm long
Weight	205gms (nominal) body only
Screened Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 150°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

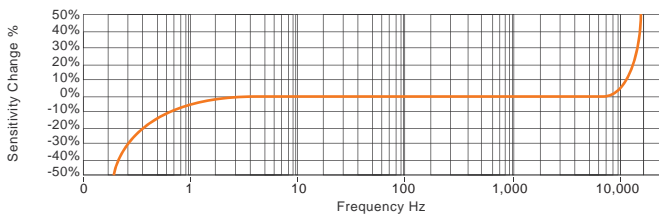

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)

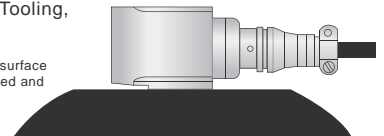

How To Order

Product Prefix	Product Series	Options											
HS - Hansford Sensors	150 - Premium Industrial Vibration Sensor	H	S	1	5	0	S	X	X	X	X	X	X
Extra Options (if required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads								
F - Filtered	010 - 10mV/g	$\pm 800g$	27kHz (1,620kcpm)	01 - PUR	02 - 1/4-28" UNF Male								
L - 316L Stainless Steel	030 - 30mV/g	$\pm 250g$	25kHz (1,500kcpm)	02 - Braided	06 - M6 x 1mm Male								
RT - Temperature Output PT100	050 - 50mV/g	$\pm 160g$	23kHz (1,380kcpm)	07 - Silicon	08 - M8 x 1.25mm Male								
S - 90° Side Exit	100 - 100mV/g	$\pm 80g$	21kHz (1,260kcpm)	08 - Flame Retardant									
T - Temperature Output	250 - 250mV/g	$\pm 32g$	19kHz (1,140kcpm)	50 - 2 Pin MS									
Y - 5% tolerance on sensitivity	500 - 500mV/g	$\pm 16g$	17kHz (1,020kcpm)	54 - M12									



acoem

ACOEM Australia
8/69 Sir Donald Bradman Drive
Hilton SA 5033
Adelaide Australia

+61 (0)8 8355 8000
info.au@acoem.com



We reserve the right to alter the specification of this product without prior notice

TS216.9